


BLU-TEC

POWERED BY **Promati**

DUST TIGHTENING

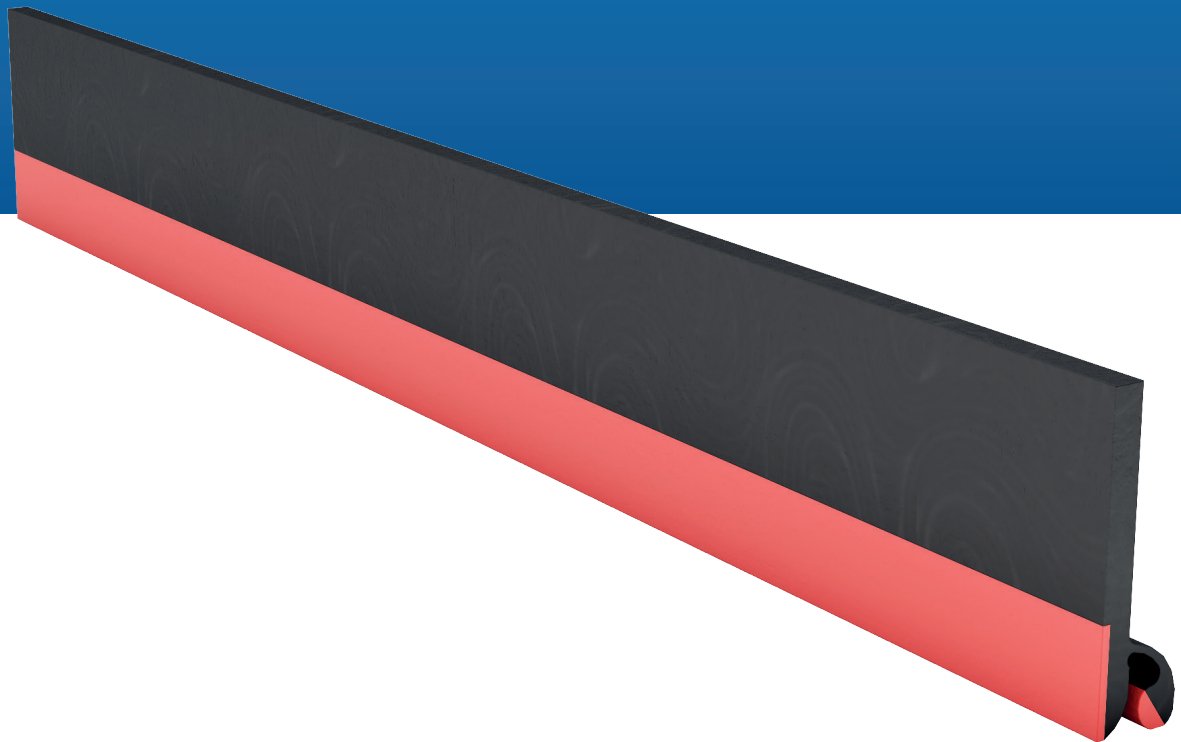

Ambachtenlaan 3 - 9990 Maldegem - T. +32 10 84 83 90 - F. +32 10 84 83 99
Chaussée de Wavre 362 - 1390 Grez-Doiceau - België - T. +32 10 84 83 90 - F. +32 10 84 83 99
Nikkelstraat 45 - 4823 AE Breda - Nederland - T. +31 162 47 14 99
info@blu-tec.eu
www.blu-tec.eu

Dust Tightening



Sealing system with standard clamps

STANDARD CLAMPSYSTEM:

- ✓ 2 clamps in galvanised steel
- ✓ 1 angle in aluminium, length 1 meter

DUO-SEAL SEALING RUBBER REINFORCED WITH POLYURETHANE STRIPS:


- ✓ Thickness: 15 mm
- ✓ Height: 150 mm or 120 mm
- ✓ Hardness: 60 ° Shore
- ✓ Packaging: rolls of 30 meters
- ✓ Also available in high temperature version (in EP)

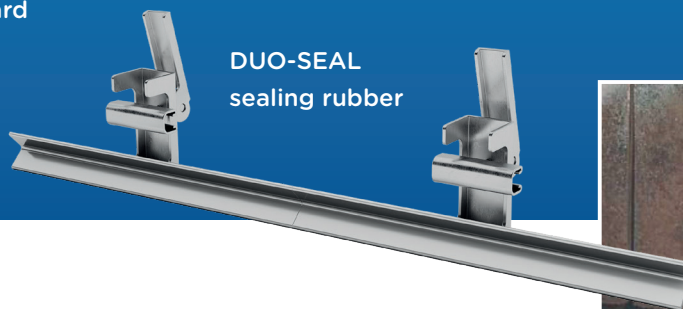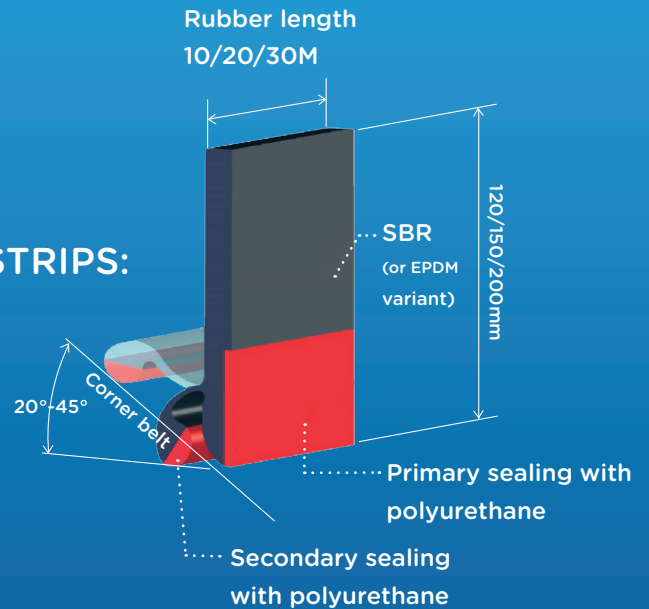

Sealing system
for discharge points


DUO-SEAL Normal applications

- ✓ Thickness: 15 mm
- ✓ Height: 120 mm or 150 mm (or 200 mm)
- ✓ Hardness: 60° Shore
- ✓ Rubber reinforced with polyurethane strips

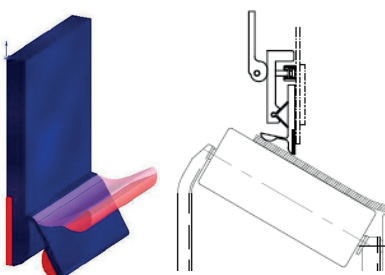

TRI-SEAL Heavy-duty applications

- ✓ Thickness: 25 mm
- ✓ Height: 150mm (6") or 200mm (8")

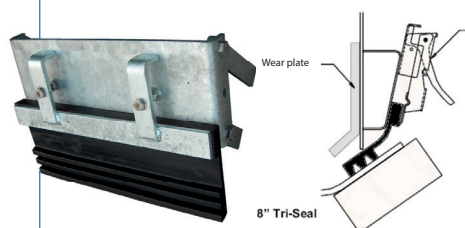

MULTI-SEAL Heavy-duty applications

- ✓ Thickness: 22 mm
- ✓ Height: 200 mm (8")

